

“DMX-LRGB+W/LED9” COMPLETE SYSTEM : 9W RGB+W LED LIGHT SOURCE

The led light sources of the "Led LRGB + W" series are produced for use with both glass optical fibers and synthetic optical fibers.

The led light sources "LRGB + W" allow you to control the color of the light emitted and the speed of color rotation, creating scenographic effects via radio frequency remote control, rf touch panel, dali and dmx. The illuminators are already prepared thanks to the integrated electronics, for connection to an unlimited number of illuminators while maintaining the synchrony of the colors.

TECHNICAL FEATURES

- RGB+W led (red, green, blue + white)
- Power 9W
- Fanless cooling
- LED life 50,000 hours
- IP54 illuminator protection (IP65 on request)
- Mains power supply 220-240VAC / 50-60Hz

COLOR CONTROL VIA DMX SIGNAL



SIGNAL CONTROL FUNCTIONS DMX

Electronic card interface for the control and programming of scenographies through DMX 512 signal on four channels: red, green, blue and white.

**INDIVIDUAL COMPONENTS THAT MAKE UP THE
“DMX-LRGB + W / LED9” LIGHTING SYSTEM**

9W RGB+W LED LIGHT SOURCE




DMX INTERFACE



POWER SUPPLY DMX INTERFACE



DIMENSIONS

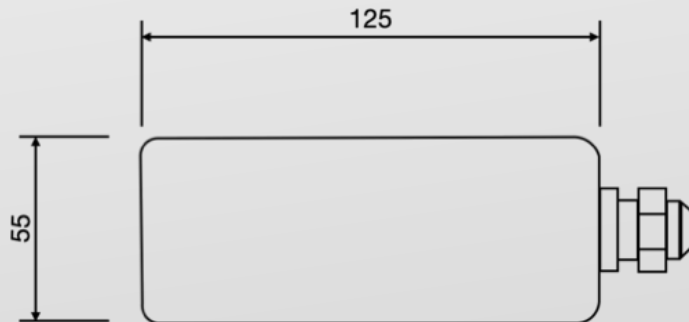

LED LIGHT SOURCE - FIBRE OPTIC BUNDLE CONNECTION



9W RGB+W LED LIGHT SOURCE



COMMON END

FIBRE OPTIC BUNDLE



**INSERT THE COMMON END INTO THE LED LIGHT SOURCE AND LOCK
THROUGH THE SCREW SET ON THE LIGHT SOURCE**