



"LWH-LED3+RF" SYSTEM : LED WHITE SOURCE WITH RF REMOTE CONTROL

The Led light sources "Led LWH" Series are produced to be used with glass and pmma optical fibers.
The "LWH" are available with three different white color temperatures:
warm white 3000° k
natural white light 4000° k
cold white 5500° k
The led white light sources are provided with a power supply to be connected directly to 110-240VAC.

TECHNICAL FEATURES
3W white LED high power
Fanless cooling
IP54 protection (IP65 on request)
Led lifespan 50.000 hours
Supply voltage: 230V-50/60Hz
(Supply voltage on request : 12V or 24V)



"LWH-LED3" SYSTEM'S COMPONENTS

3W LED LIGHT SOURCE




**RECEIVER MODULE
RF SIGNAL**



RF REMOTE CONTROL



DIMENSIONS

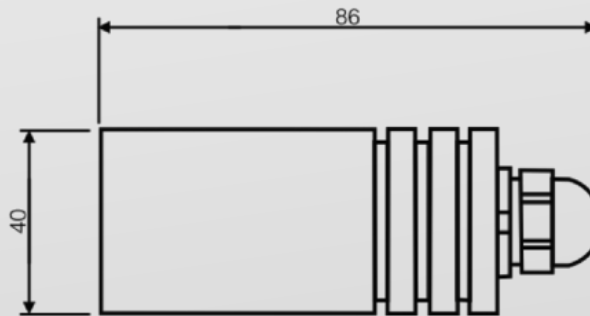

LED LIGHT SOURCE - FIBER OPTICS BUNDLE CONNECTION



3W LED LIGHT SOURCE



COMMON END FIBER OPTICS BUNDLE



INSERT THE COMMON END IN THE LIGHT SOURCE AND BLOCK IT THROUGH THE SCREW SET ON THE LIGHT SOURCE

THE "LWH-LED3+RF" ILLUMINATOR SYSTEM WITH RF REMOTE CONTROL



RF REMOTE CONTROL FUNCTIONS

